



4100 Plus Swing Door Operator

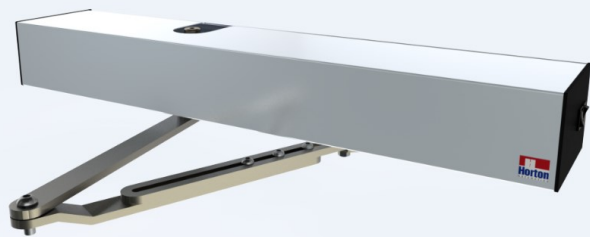

Horton 4100 Plus.

The new Horton 4100 plus universal swing door operator.

- Slimline design—dimensions 680mm x 130mm x 90mm.
- Heavy duty unhandled design
- Elegant silver anodised housing with black metal end caps
- Push and pull options—Articulated push arm—Slide channel pull arm
- Standard power opening adjustable spring closing
- Optional power close function
- Adjustable closing force from EN4 to EN6
- “Heavy duty Full Power” and “Low Energy” operation.
- Manual operation on power failure— controlled opening and spring closing
- Suitable for door leaves from 700mm to 1400mm (weight dependant)
- Maximum door leaf weight 250Kg (door leaf width dependant)
700mm width 250Kg— 1400mm width 115Kg
- Synchronised operation for paired doors
- Standard “Auto—Off—Hold Open” via operator mounted mode selector
- Full monitoring of all applied safety devices
- Various activation options — Motion detectors — Manual — Access Control
- Optional 3 position key switch mode selector
- Option one way operation key switch mode selector
- Optional first entry key switch.
- Standard electric lock interface 12/24 Vdc—15W max
- Optional powder coat and other metal finishes
- Full 12 month warranty

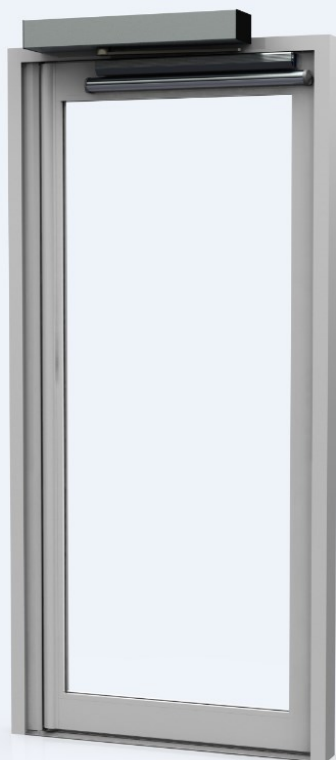

Horton Automatics Ltd

Unit A, Hortonwood 31, Telford, Shropshire, TF1 7YZ

Tel: 01952 670169

Fax: 01952 670181

Email: sales@horton-automatics.ltd.uk